

Highlight HPC015S TV display system setting

A: Connect mini box2 to the local net work and get the "server" link (interface url)

1. Be sure the WIFI(connect people counter) and the NET Cable (connect mini box2) are in the **same local network**, this is very important, please follow the next steps one by one:
2. Plug the net cable to mini box2, connect mini box2 to the local network. (**be sure this is the first step to do**)
3. Connect Mini box2 and TV with HDMI cable.
4. Switch on the TV and Choose the HDMI Channel, be sure it is the right HDMI Channel because usually the TV has many HDMI ports.
5. Turn on mini box2, and it will automatically login the people counter software and show the below photo. you will see the below picture (it will stop here for 60 seconds for you to take a picture or write down the link, you will use the link later to connect people counter to the WIFI).



Report url : It is the link that you will see the in and out people flow report.

Interface url: it is the link that you can login and make the setting, change the name, change color, and it is also the "server" link to upload data, you need to input it into the people counter later.

if you want to restart the mini box2 to see the link again, you can plug a mouse on the minibox2 (USB) and right-click and "quit". you will see the windows desktop and then restart the mini box2, it will run again and show the above picture again.

Attention:

1. you MUST bind the mini box2 IP in your router, for example, the above picture IP is 192.168.1.9, you should login in your router and bind this IP address to our mini box2. or else, the link may change every time when you turn off and turn on the mini box2, then the people counter will has a wrong server address and the TV screen data will not change anymore till you change the server in the people counter again. so you must bind this mini box2 IP in your router to avoid such problem.


2.If the two links are <http://127.0.0.1>....., then it is a **wrong network connection**, it meant that your router didn't give mini box2 an IP address.

B: Make the setting of HPC015S People Counter


1. Put the battery into the people counter, and don't close the cover.
- 2.Take the Receiver(the one with screen and button), click the button till you see " keep press to AP", please check below picture, then hold on for 2 seconds to start AP.



Then use your mobile phone to connect WIFI named "people counter"

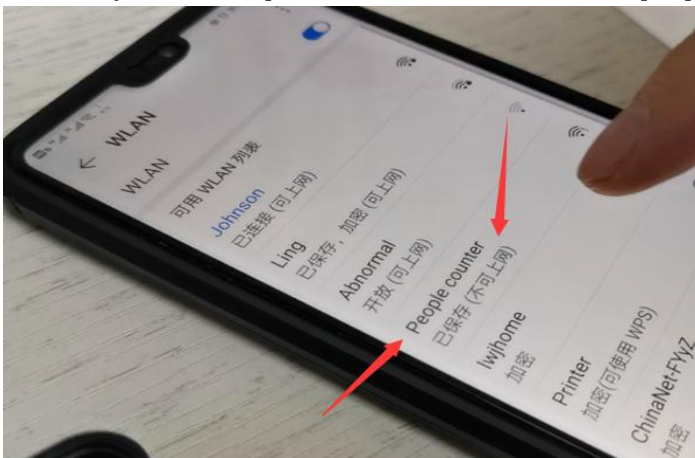

connect this WIFI, and open your browser and input 192.168.8.1, you will get our setting interface as below:

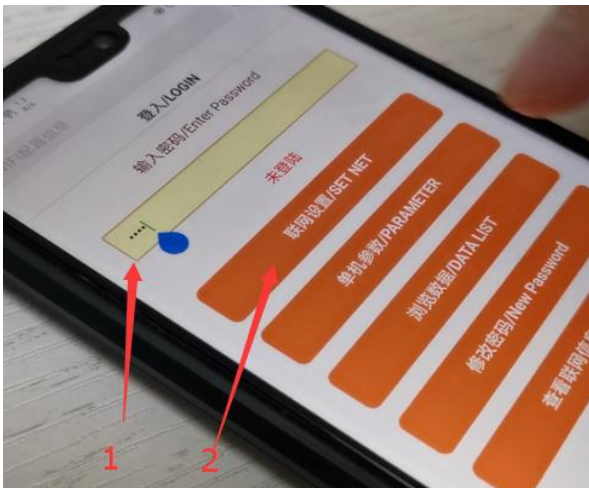


Input password : 1234

Then click: Set Net

you will get below picture



Input your wifi name ,password and server link(interface url) which you already get in above step A:5 (see the first picture of this manual)

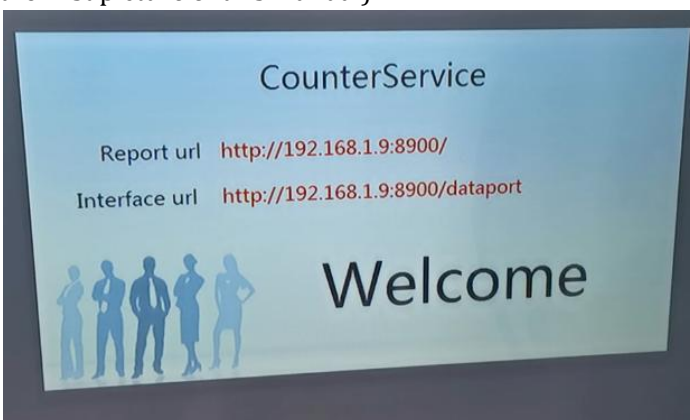

Be sure to input the accurate name, password and serve , pay attention not to input "blank space".

Then click "save"

Then check the people counter, you will see the below:



After several seconds, **if you input everything right, and your network has no problem**, and people counter and mini box2 are in the same local network, you will get below confirmation: "Setting is ok":



That means, all settings have been finished successfully.

C Installation of the people counter

1. In and out, please face to the receiver of the people counter, the right is "out" direction, the left is "in" direction.



2. Installation Height suggestion: the Height of the Chest (different height due to different countries) .




Attention: The transmitter and receiver sensors installation should be "face to face" and at the same height.

D: Make the setting of the interface:

1. Use your mobile phone to set the interface:

Open the **mobile phone browser** and type the report url (the first Link on the picture), you will get below interface:

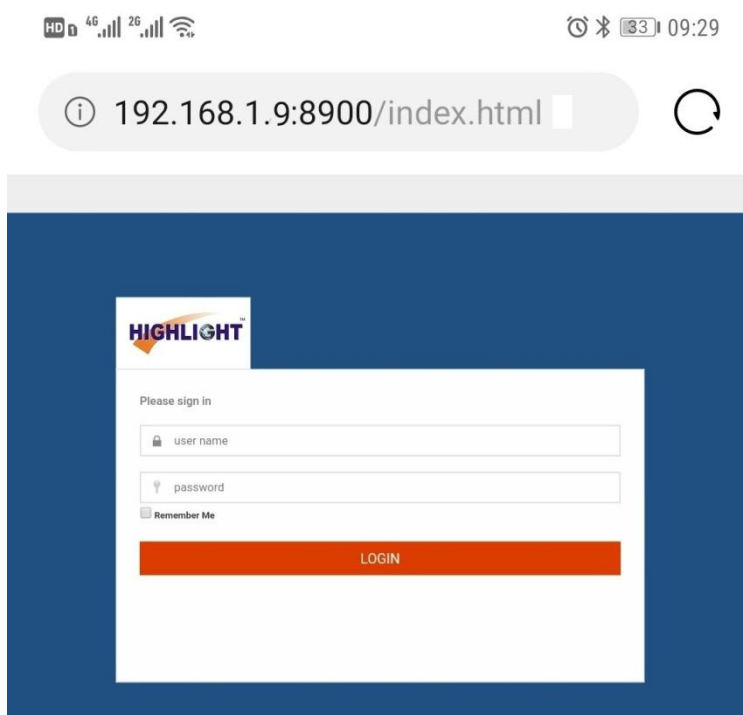

User name: admin
password: admin5566

Then you can change the stay limit number and the background color...etc here.

Save

General Setting

Big Screen Enable :

☒

Stay Limit :

Company Logo :

选择文件

未选择任何文件

Prompt Sound :

选择文件

未选择任何文件

Repeat Times :

Prompt sound repeat times,"0" No Play.

Normal Status Setting

Background Color :

Stav Color :

Comany logo: you can design your own Logo+ company name, and upload by clicking " company logo"

Prompt Sound: you can design your own sound or record a sound and upload by clicking "prompt sound" and you can set the sound repeat times too.